

WONIL BEARING INDUSTRY CO.,LTD.

WBC


WBC TANDEM THRUST BEARING

WBC TANDEM THRUST BEARING 규격표


| BEARING NO. | Dimensions | | | Rows | Load Rating (KN) | |
|------------------|----------------|----------------|--------|------|------------------|-------|
| | Inner Diameter | Outer Diameter | Height | | c | co |
| T-1570-4 | Ø15 | Ø70 | 153.00 | 4 | 328 | 820 |
| T-2270-3B | Ø22 | Ø70 | 82.00 | 3 | 228 | 589 |
| T-2270-4B | Ø22 | Ø70 | 109.50 | 4 | 304 | 785 |
| T-2270-6(53507) | Ø22 | Ø70 | 182.20 | 6 | 456 | 1,178 |
| T-2390-3A(412) | Ø23 | Ø90 | 97.00 | 3 | 417 | 1,250 |
| T-2390-3B(346) | Ø23 | Ø90 | 97.00 | 3 | 419 | 1,189 |
| T-2390-4A(81684) | Ø23 | Ø90 | 129.50 | 4 | 559 | 1,666 |
| T-2390-4B(58771) | Ø23 | Ø90 | 129.50 | 4 | 568 | 1,585 |
| T-2390-6(53043) | Ø23 | Ø90 | 200.00 | 6 | 750 | 2,439 |
| T-2390-8(81657) | Ø23 | Ø90 | 271.25 | 8 | 1,127 | 3,251 |
| T-25105-6(52548) | Ø25 | Ø105 | 247.00 | 6 | 1,299 | 2,940 |
| T-25105-8 | Ø25 | Ø105 | 384.00 | 8 | 1,732 | 3,933 |
| T-2872-6 | Ø28 | Ø72 | 161.20 | 6 | 483 | 1,354 |
| T-3092-6 | Ø30 | Ø92 | 294.00 | 6 | 713 | 2,079 |
| T-30127-6(52523) | Ø30 | Ø127 | 288.00 | 6 | 1,540 | 5,500 |
| T-33105-3(51909) | Ø33 | Ø105 | 115.00 | 3 | 696 | 1,973 |
| T-33105-4 | Ø33 | Ø105 | 153.50 | 4 | 928 | 2,631 |
| T33105-6 | Ø33 | Ø105 | 229.00 | 6 | 1,393 | 3,946 |

※ 기타 텐덤베어링 다량 보유

텐덤 스러스트 베어링의
하중전달 방향
Flow of force in the
Tandem Thrust Bearing

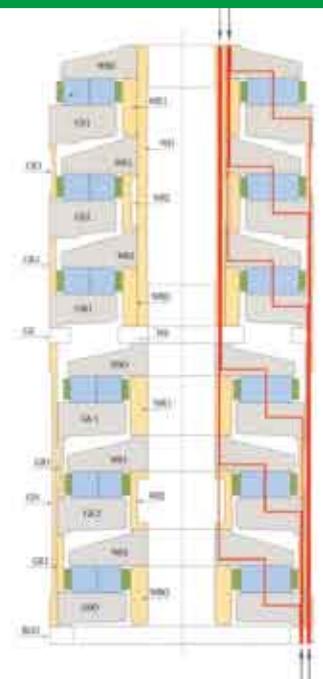

- WBC 텐덤 스러스트 베어링은 일직선상에 병렬로 조합된 여러 개의 원통 로울러 스러스트 베어링에 내·외륜(Ring,Washer,Bush)등의 부품을 최적의 조건으로 조합하여 설계하였습니다.
- WBC 텐덤 스러스트 베어링은 좁은 공간에서 높은 하중을 일정하게 받을 수 있으며, 축방향으로 견고하게 지지하면서도 작은 마찰력으로 긴 수명을 유지합니다. 또한 베어링은 주로 오일 윤활에 의하여 구동됩니다.
- WBC 텐덤 스러스트 베어링은 고무 및 플라스틱 산업에서 Single 및 Twin 압출성형기의 기어BOX 및 깊은 홈 드릴머신에 사용됩니다.

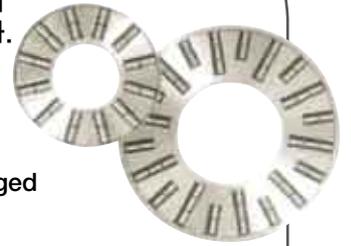

- 텐덤 스러스트 베어링의 축 공차 (f6)
- 텐덤 스러스트 베어링의 하우징 공차 (F7)
- WBC Tandem Thrust Bearings consist of various axial cylindrical thrust roller bearings arranged coaxially. It designed the specialized system of matched rings, washers & bushs.
- WBC Tandem Thrust Bearings offer the optimum solution of the following requirements;
 - limited radial space
 - high axial forces
 - long operating life
 - low frictional power


and, Tandem thrust bearings must always be lubrication by oil circulation.

- WBC Tandem Thrust Bearings have proved themselves, principally in gearboxes for single and twin screw extruders in the rubber and plastics industries. Further possible applications include deep hole drilling machines & friction welding machines.
- The shaft Tolerances of Tandem thrust bearings - f6
- The Housing bore of Tandem Thrust Bearings - F7

텐덤 2열(T2AR), 텐덤 3열(T3AR), 텐덤 4열(T4AR), 텐덤 6열(T6AR), 텐덤 7열(T7AR), 텐덤 8열(T8AR) ※텐덤 스러스트 베어링은 전량 주문 생산 합니다.

Tandem 2rows(T2AR) Tandem 3rows(T3AR) Tandem 4rows(T4AR) Tandem 6rows(T6AR) Tandem 7rows(T7AR) Tandem 8rows(T8AR)

F - 53507

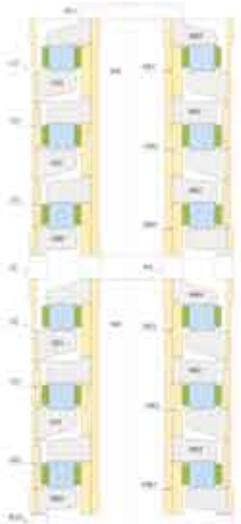

F - 53043



F - 51909

